




4940 Series

016-4941-002A

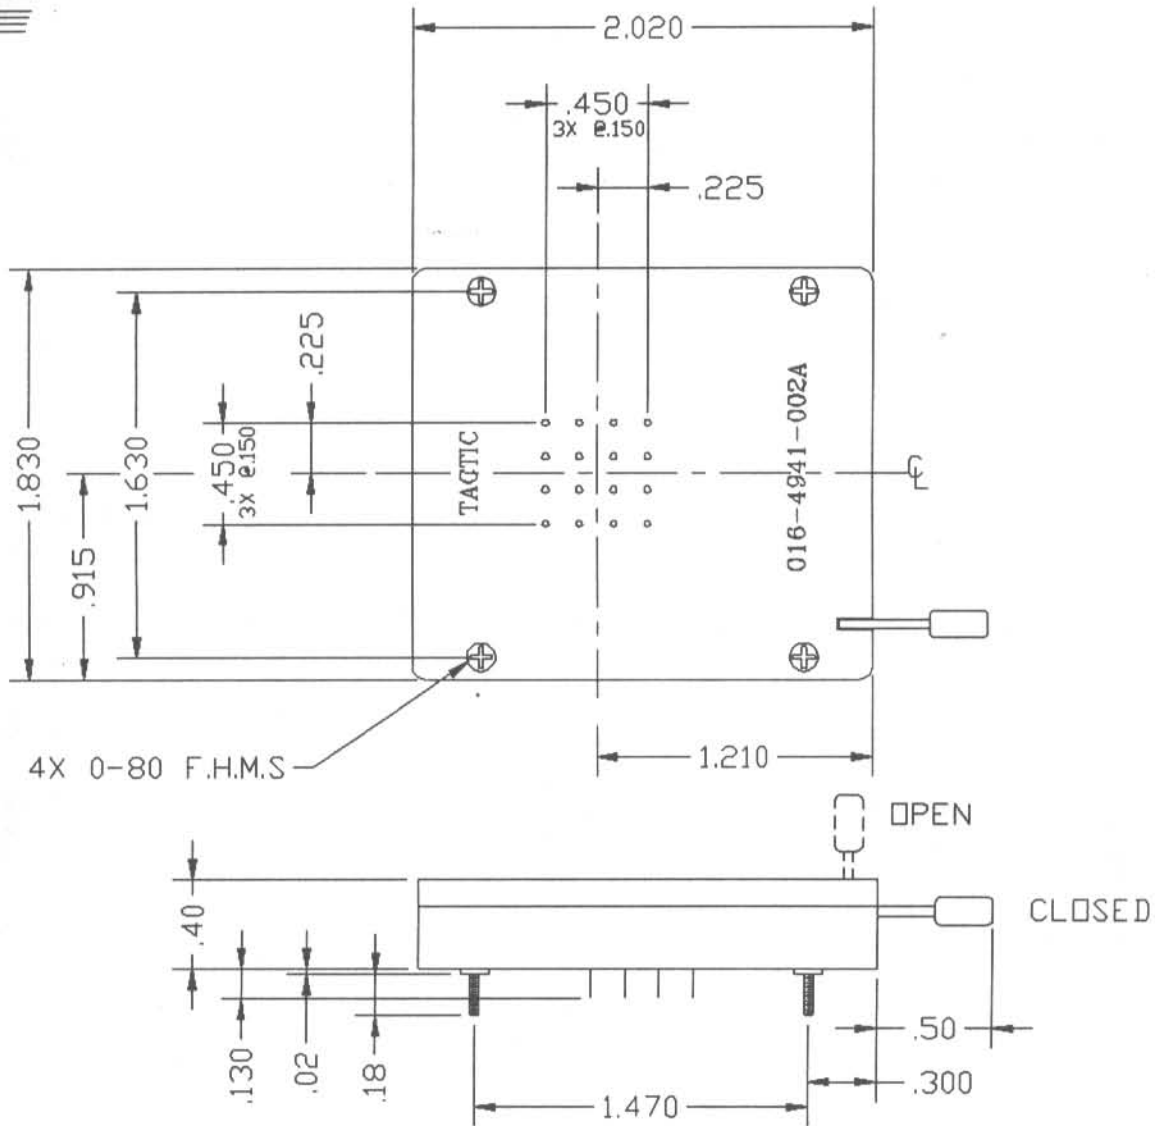

This series is identical to 3540 series with the exception of the overall size.

Maximum working area: 1.3" x 1.1"
 Minimum lead length: .100"
 Lead size accepted: .020"

Physical Insulation material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact (.130" lg x .014" x .028")
 Material: Beryllium Copper
 Plating: 30μ (.76μm) Gold-MIL-G-45204
 Type II, Grade C over 50μ (1.3μm)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local Tactic Distributor for design and pricing.

Phone: 1-800-955-4707