




4940 Series

019-4940-001A

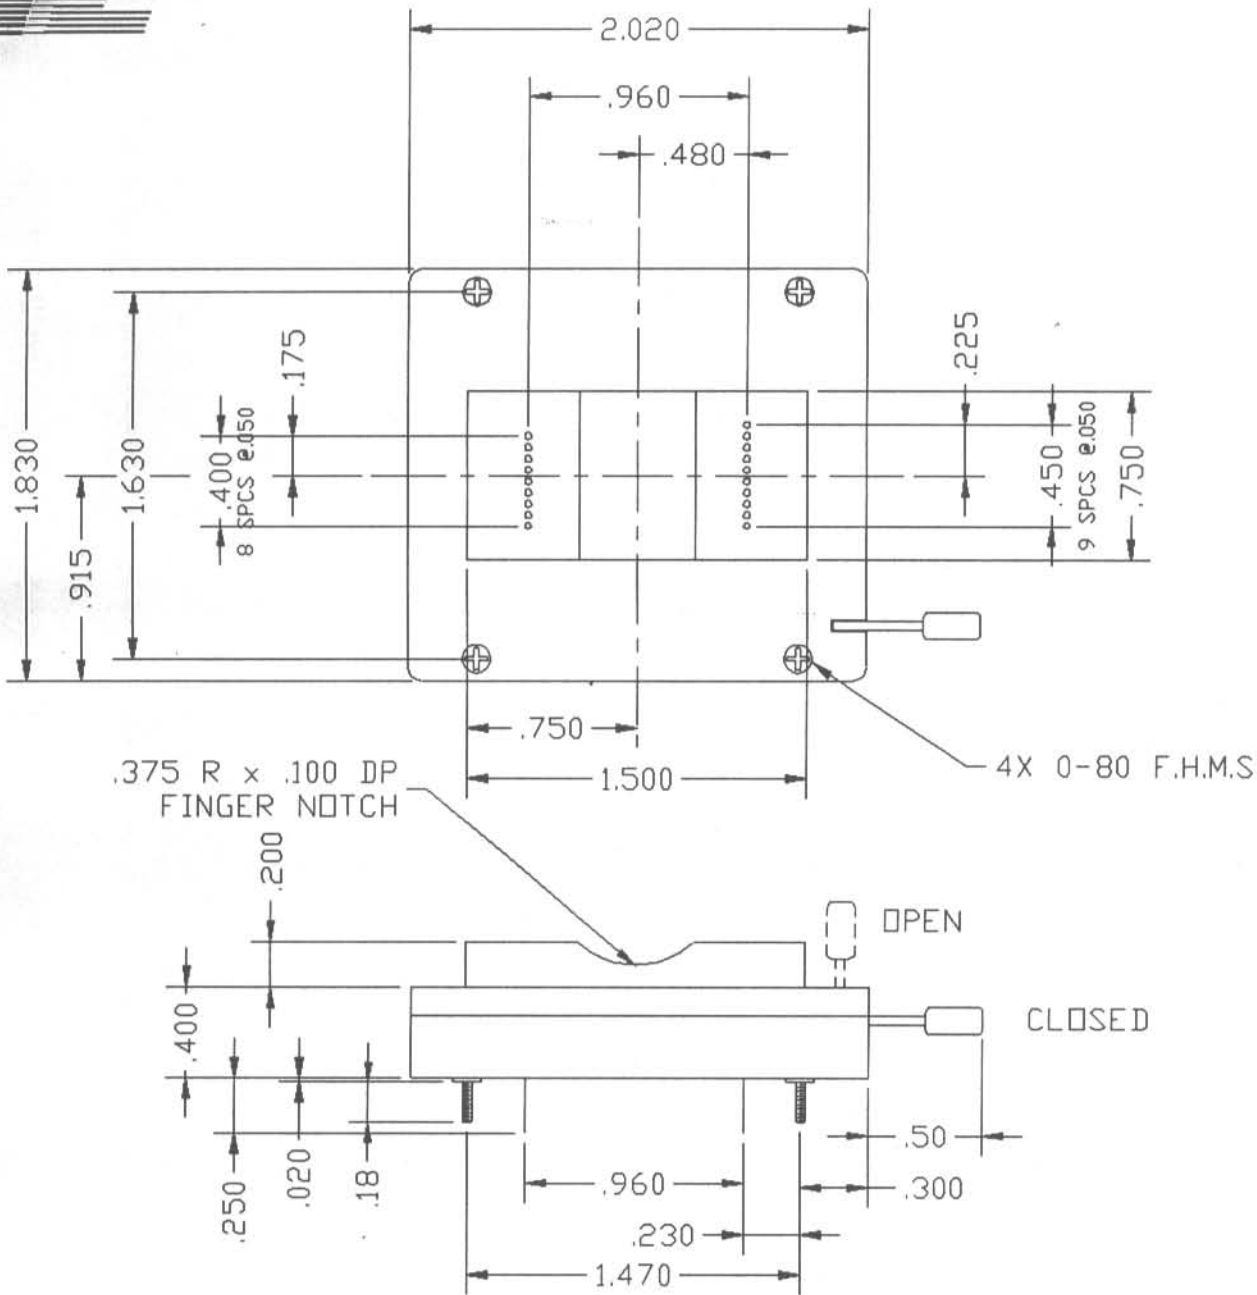

Physical	Insulation material: Glass Reinforced; Polysulfone	Contact (.250" lg x .010" x .018")
	Flammability: UL 94V-0	Material: Beryllium Copper
	Color: Green	Plating: 30 μ " (.76 μ m) Gold-MIL-G-45204
		Type II, Grade C over 50 μ " (1.3 μ m)
		Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹ Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

*Consult factory or your local Tactic Distributor for design and pricing.
 Phone: 1-800-955-4707*