




4940 Series

020-4940-002A

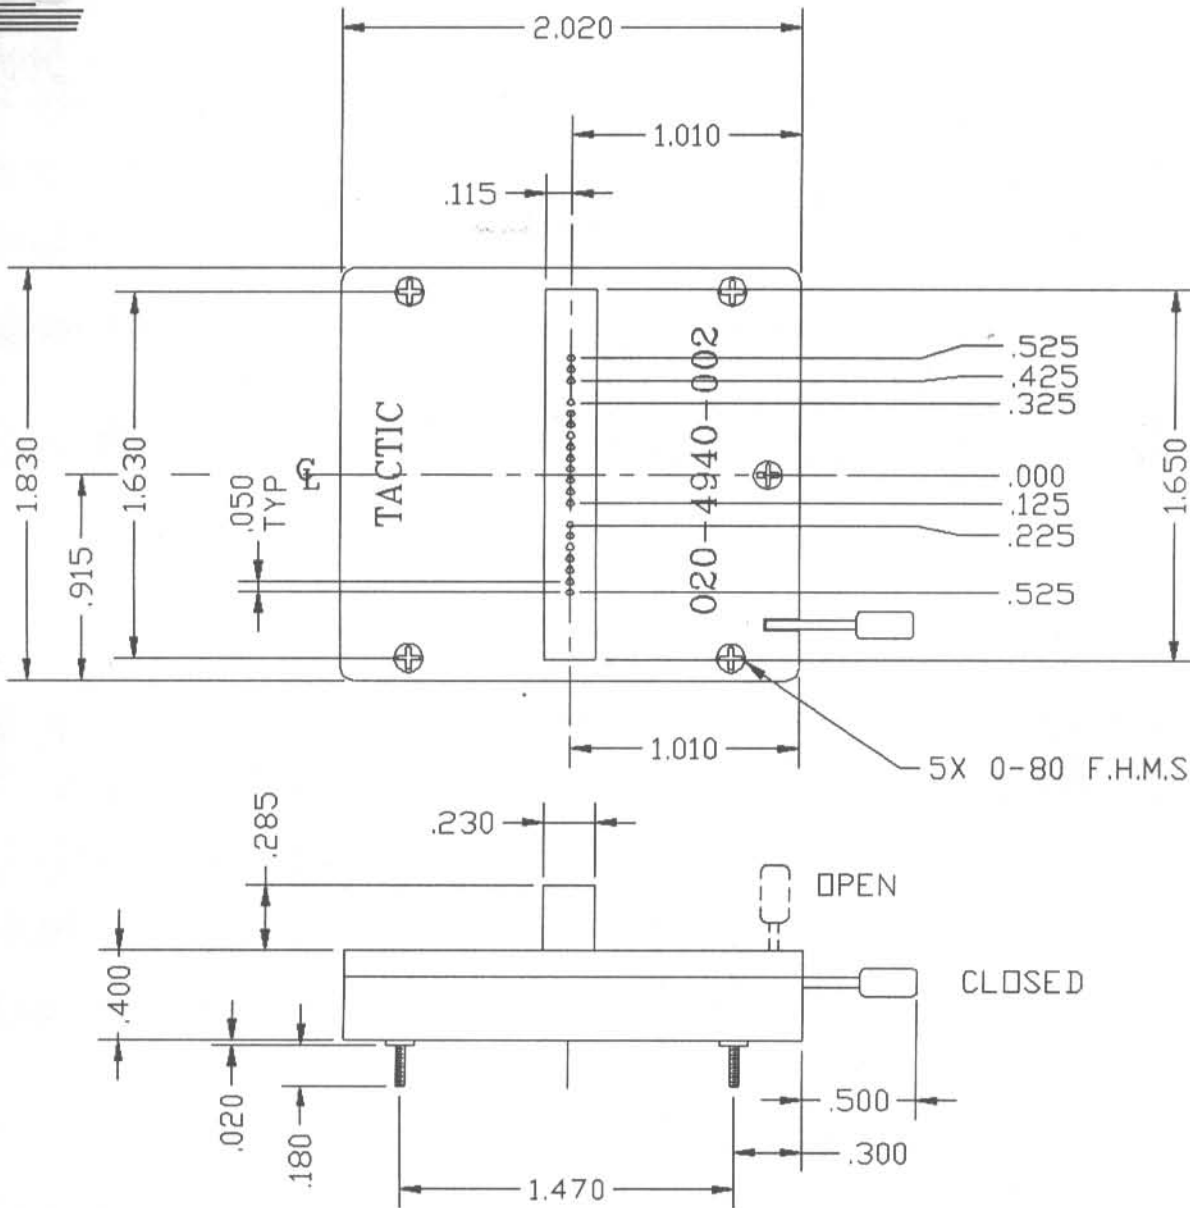

This series is identical to 3540 series with the exception of the overall size.

Maximum working area: 1.3" x 1.1"
 Minimum lead length: .400"
 Lead size accepted: .010" x .019"

Physical Insulation material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact (.250" long x .010" x .018")
 Material: Beryllium Copper
 Plating: 30 μ " (.76 μ m) Gold-MIL-G-45204
 Type II, Grade C over 50 μ " (1.3 μ m)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹ Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

Consult factory or your local Tactic Distributor for design and pricing.
 Phone: 1-800-955-4707