




# 4940 Series 020-4940-003A

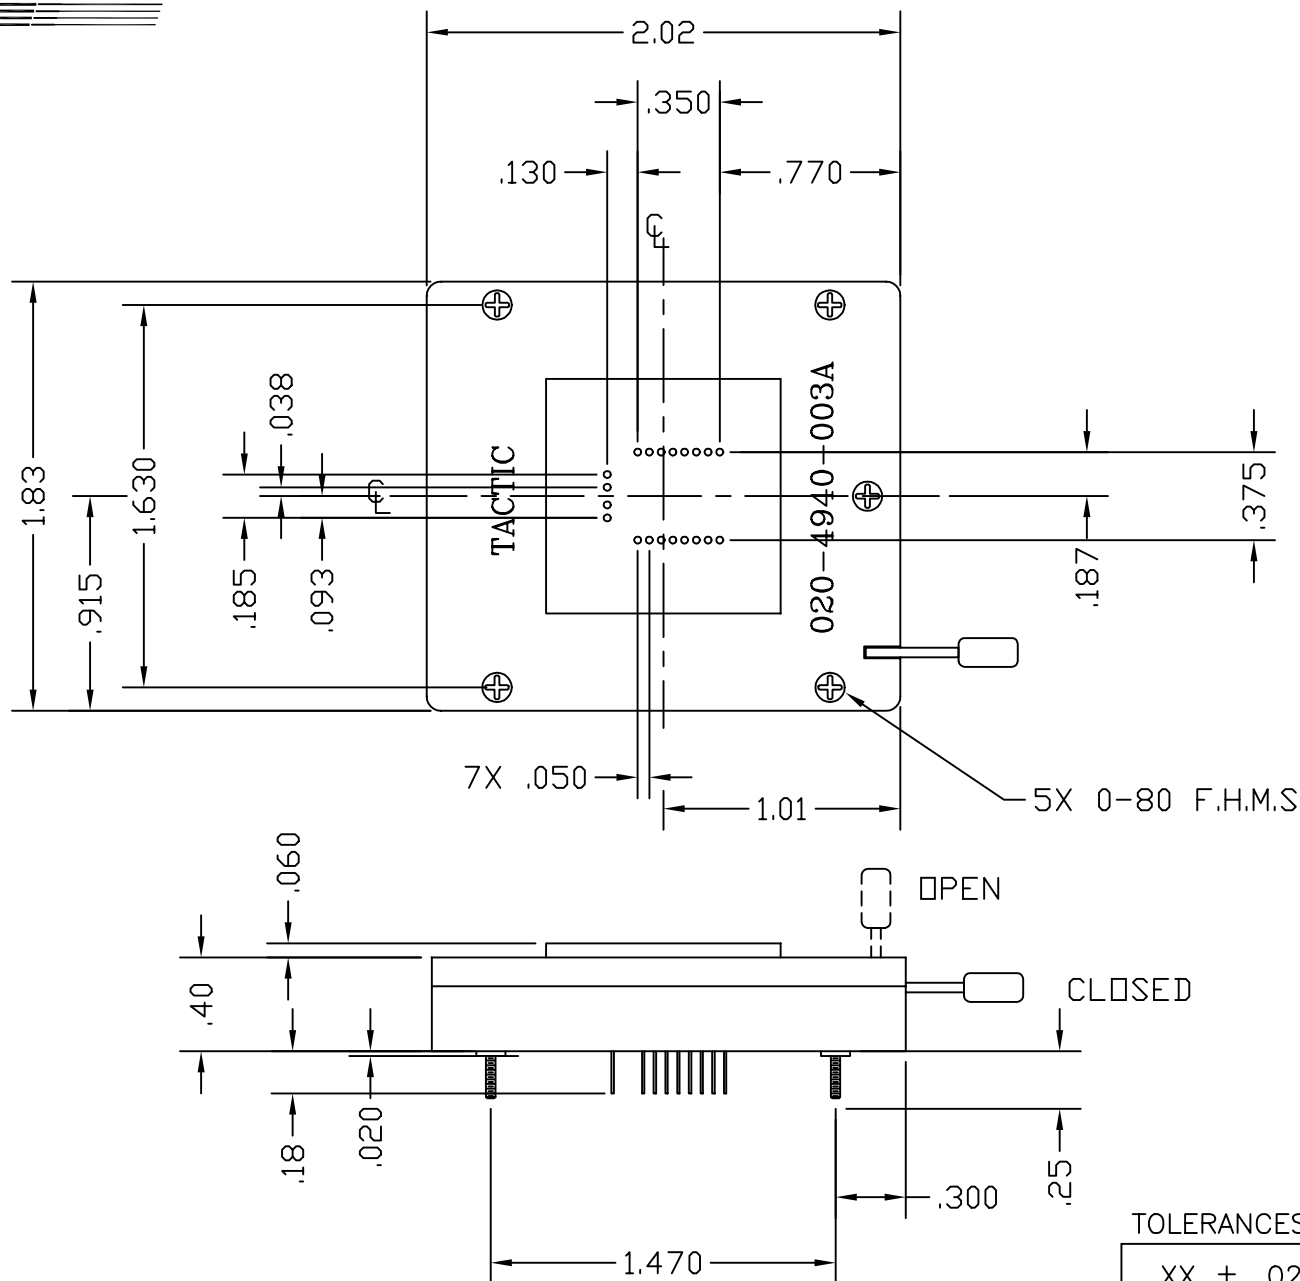

## TOLERANCES

.XX ± .020

.XXX ± .003

**Physical** Insulation material: Glass Reinforced; Polysulfone  
Flammability: UL 94V-0  
Color: Green

Contact: Min. .200 lg x .010" x .018"

Material: Beryllium Copper  
Plating: 30μ"(.76μm)Gold-MIL-G-45204  
Type II, Grade C over 50μ" 1.3μm)  
Sulfamate Nickel per QQ-N-290A

**Electrical** Current Rating: 1 Amp  
Insulation Resistance: >1x10<sup>9</sup>Ω at 500Vdc  
Withstanding Voltage: 1000 Vrms at Sea Level

**Environmental** Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TMC Distributor for design and pricing.

Phone: 1-800-955-4707

FAX: 1-972-867-6669