




3538 Series

030-3538-001A

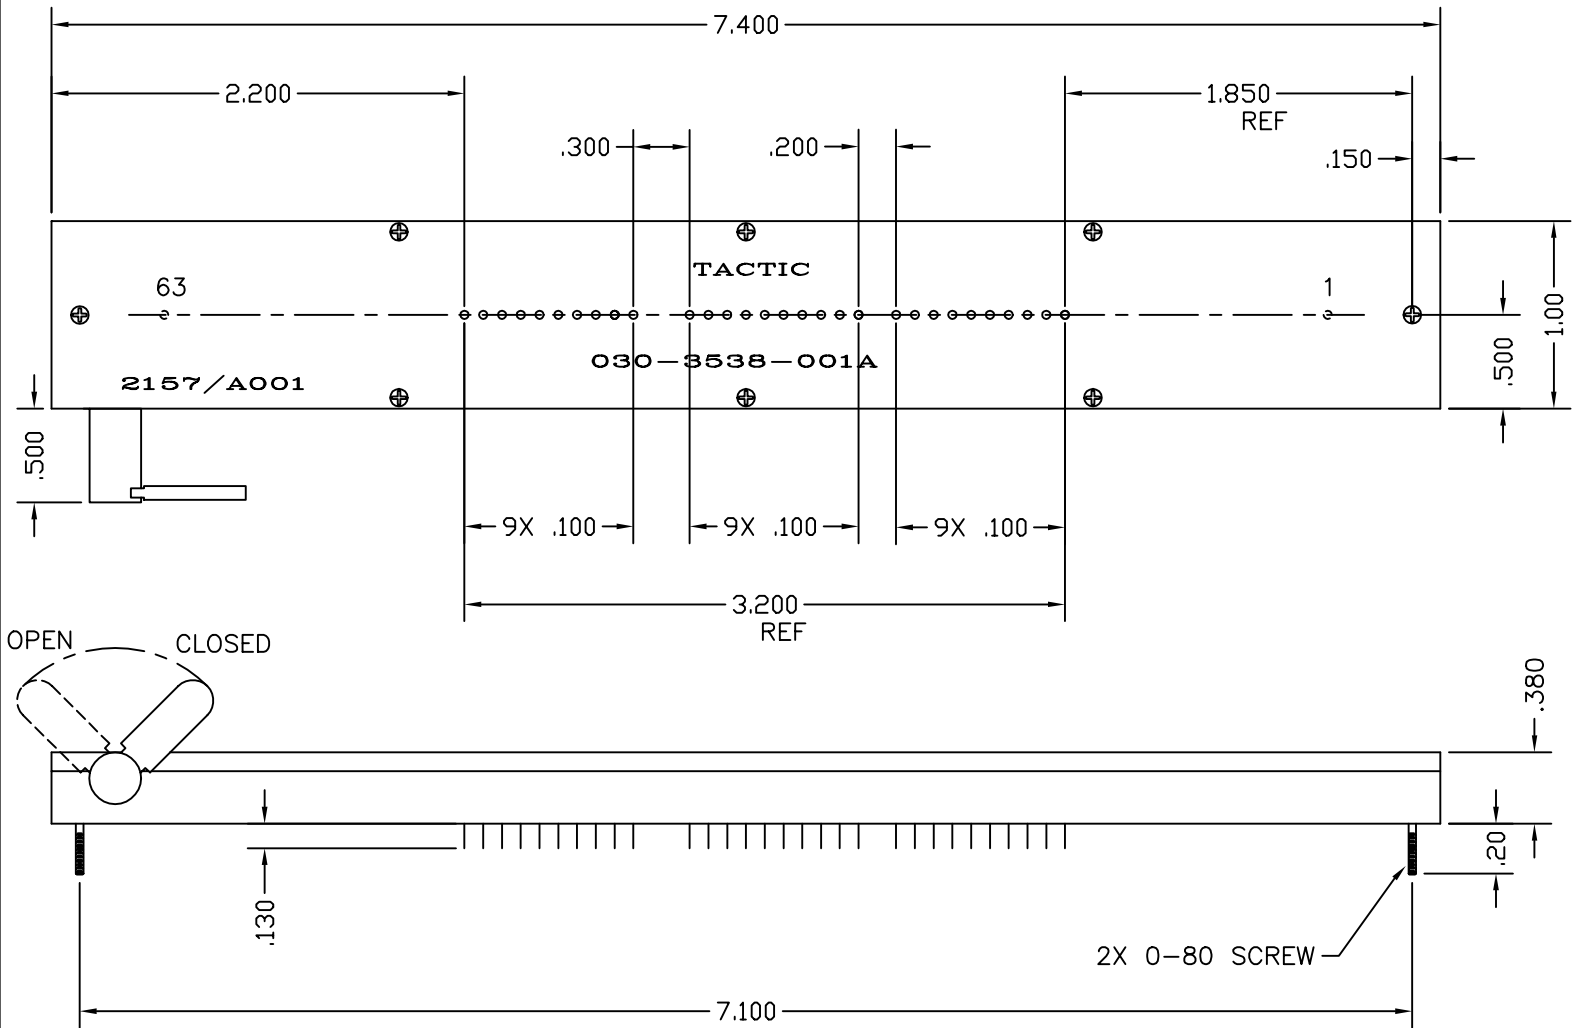

This series is designed for long in-line packages that are wider than two rows, with either square or staggered device lead patterns.

Max. working area: .70" x 6.2"
 Min. lead length: .110"
 Lead size accepted: .025" SQ

Physical Insulation

material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact (.130" lg x .010" x .028")
 Material: Beryllium Copper
 Plating: 30μ (.76μm) Gold-MIL-G-45204
 Type II, Grade C over 50μ (1.3μm)
 Sulfamate Nickel per QQ-N-290A

Electrical

Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.
 Phone: 1-800-955-4707 FAX: 1-972-867-6669