



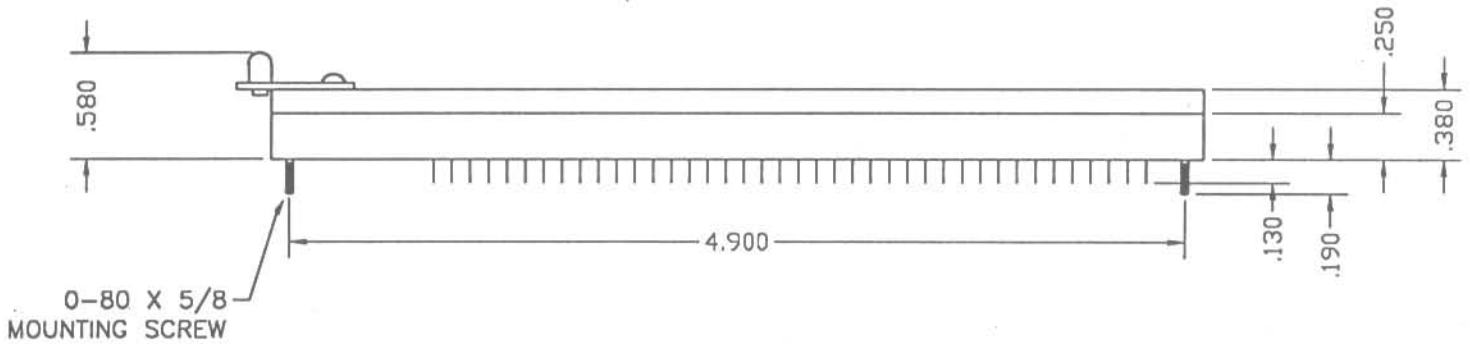

3533 Series

040-3533-002A

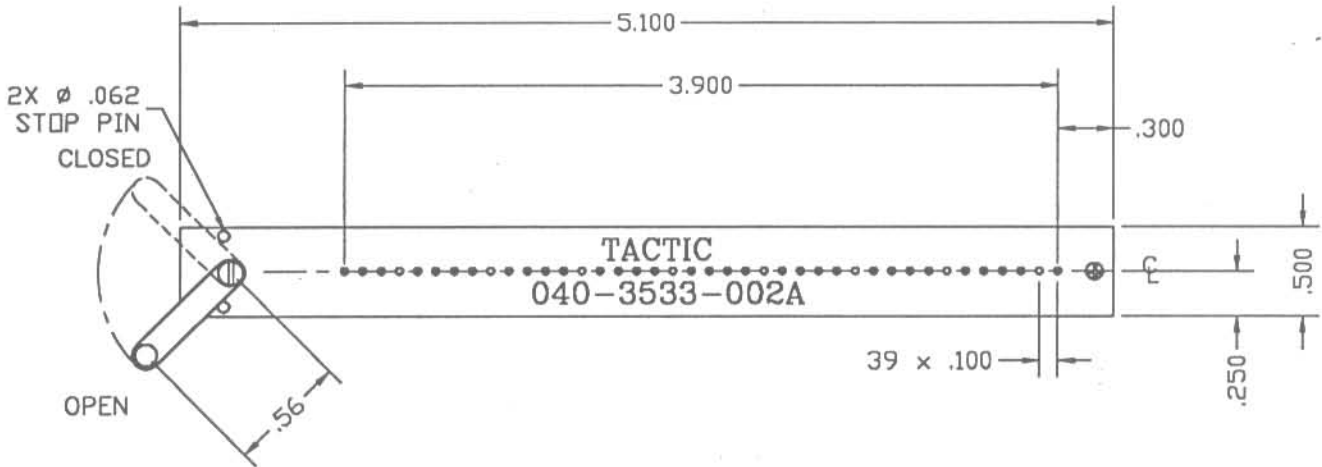

This series is designed for longer in-line packages, with either square or staggered device lead patterns.

Max. working area: .40" x 6.00"
 Min. lead length: .110"
 Lead size accepted: .6 mm

Physical
 Insulation material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact (.130" lg x .010" x .028")
 Material: Beryllium Copper
 Plating: 30 μ " (.76 μ m) Gold-MIL-G-45204
 Type II, Grade C over 50 μ " (1.3 μ m)
 Sulfamate Nickel per QQ-N-290A

Electrical
 Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹ Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local Tactic Distributor for design and pricing.
 Phone: 1-800-955-4707