




3538 Series

040-3538-004A

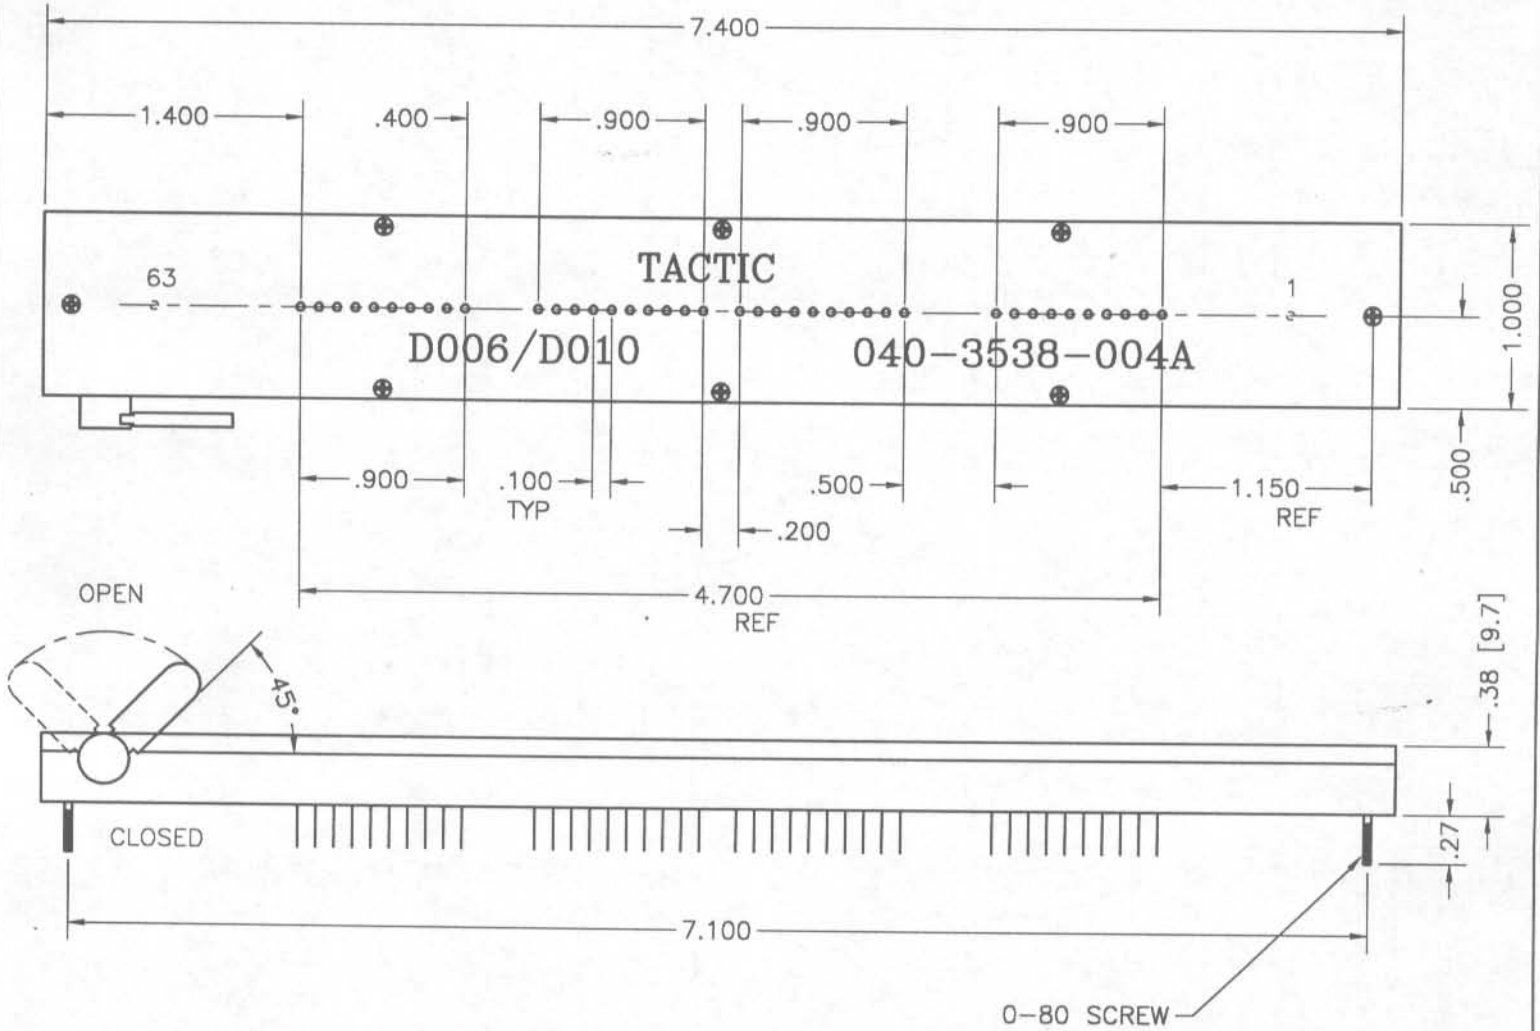

This series is designed for long in-line packages that are wider than two rows, with either square or staggered device lead patterns.

Max. working area: .70" x 6.2"
 Min. lead length: .110"
 Lead size accepted: .025 sq"

Physical	Insulation material: Glass Reinforced; Polysulfone	Contact (.130" lg x .010" x .028")
	Flammability: UL 94V-0	Material: Beryllium Copper
	Color: Green	Plating: 30μ (.76μm) Gold-MIL-G-45204
		Type II, Grade C over 50μ (1.3μm)
		Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TMC Distributor for design and pricing.
 Phone: 1-800-955-4707