



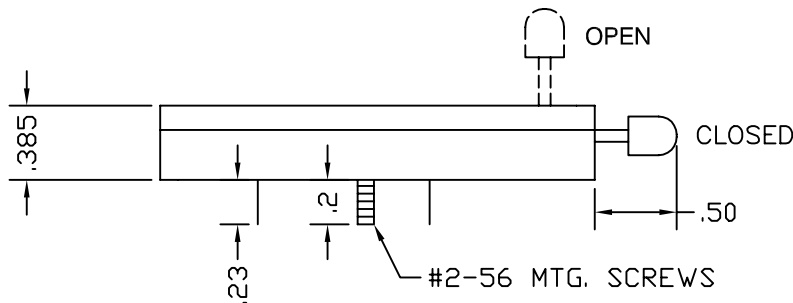

# 3540 Series

# 040-3540-004A

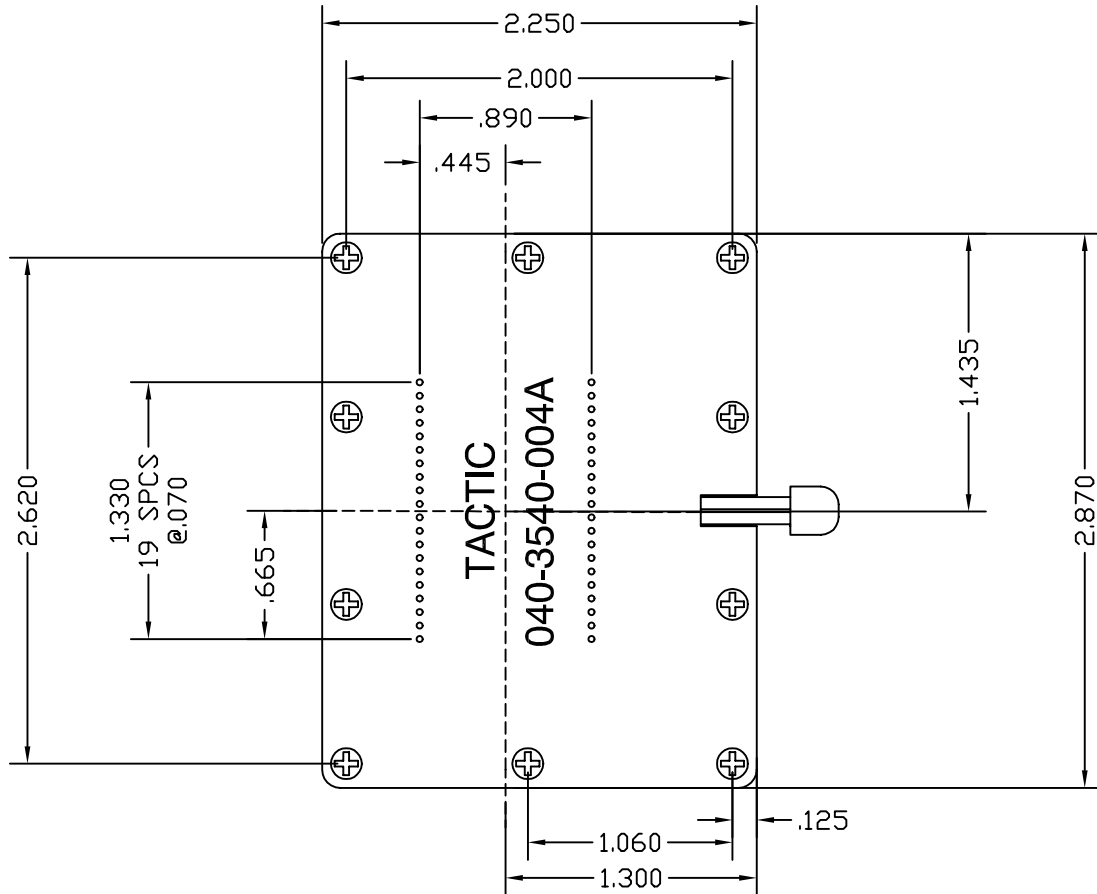

<b>Physical</b>	Insulation material: Glass Reinforced Polysulfone	Contact Tail (.010" x .018" x .23 lg)
	Flammability: UL 94V-0	Material: Beryllium Copper
	Color: Green	Plating: 30 $\mu$ "(.76 $\mu$ m)Gold-MIL-G-45204
<b>Electrical</b>	Current Rating: 1 Amp	Type II, Grade C over 50 $\mu$ "(1.3 $\mu$ m)
	Insulation Resistance: >1x10 <sup>9</sup> $\Omega$ at 500Vdc	Sulfamate Nickel per QQ-N-290A
	Withstanding Voltage: 1000 Vrms at Sea Level	Min. lead length: .100"
<b>Environmental</b>	Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)	Lead size accepted: .010" x .018"

Consult factory or your local TACTIC Distributor for design and pricing.  
 Phone: 1-800-955-4707 FAX: 1-972-867-6669