


4672 Series ZIF Socket

045-4672-001A

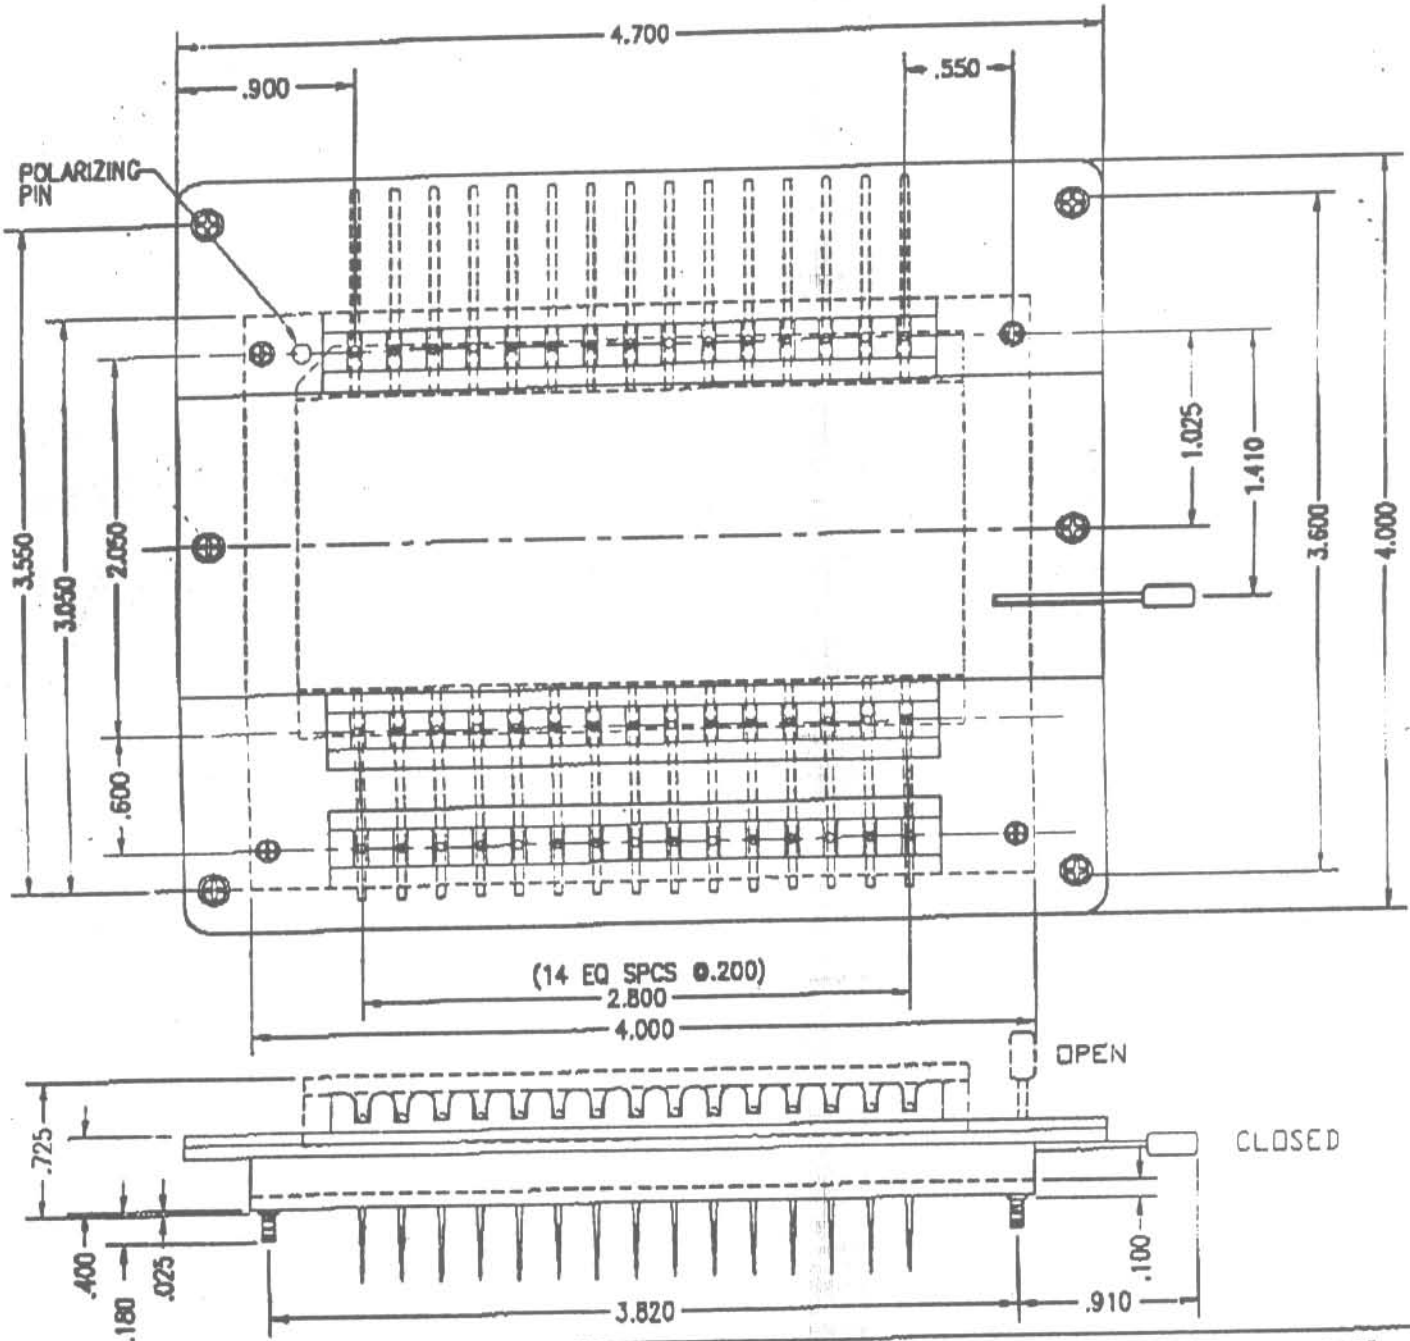

This series is identical to previously mentioned series; size is the only difference.

Lead size accepted: .040" max

Physical Insulation
 material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact (.500" lg x .017" x .045")
 Material: Beryllium Copper
 Plating: 30μ (.76μm) Gold-MIL-G-45204
 Type II, Grade C over 50μ (1.3μm)
 Sulfamate Nickel per QQ-N-290A

Electrical
 Insulation Resistance: >1x10⁹Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational:

-67°F (-55°C) to +302°F (+150°C)