




3538 Series

055-3538-001A

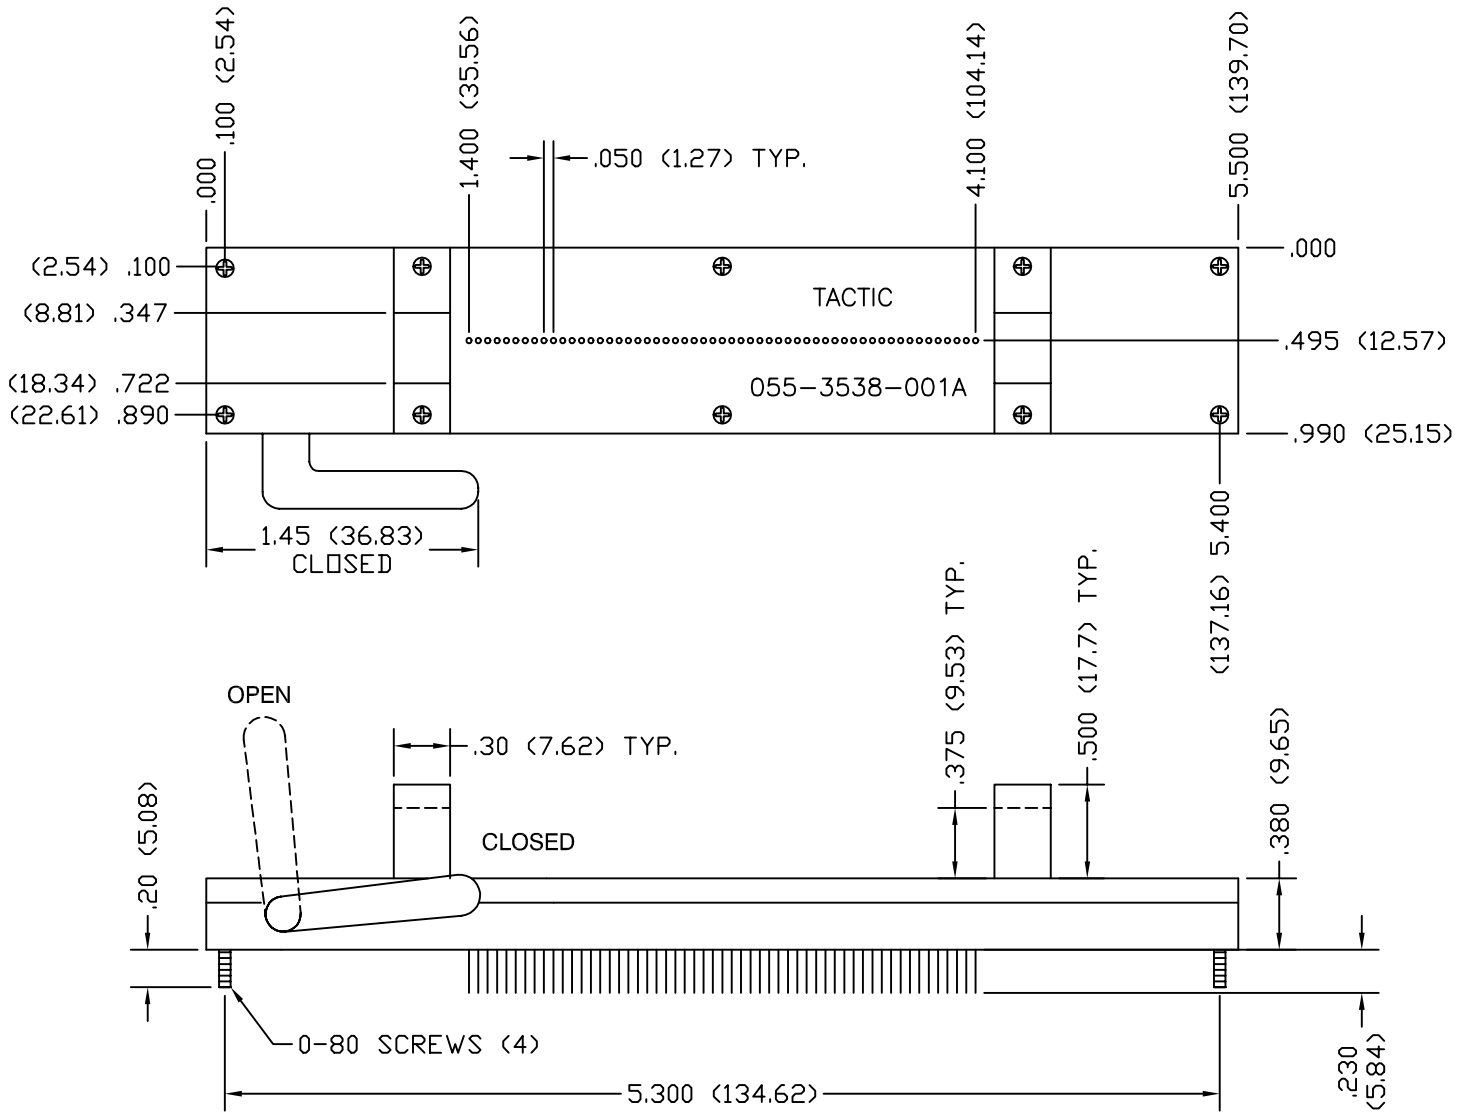

This series is designed for long in-line packages that are wider than two rows, with either square or staggered device lead patterns.

Max. working area: .70" x 5.0"
 Lead length: .50" (12.7)
 Lead size accepted: .010" x .015" (.25 x .38)

Physical Insulation

material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact (.230" lg x .010" x .018")
 Material: Beryllium Copper
 Plating: 30μ"(.76μm)Gold-MIL-G-45204
 Type II, Grade C over 50μ"(1.3μm)
 Sulfamate Nickel per QQ-N-290A

Electrical

Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

*Consult factory or your local TACTIC Distributor for design and pricing.
 Phone: 1-800-955-4707 FAX: 1-972-867-6669*