



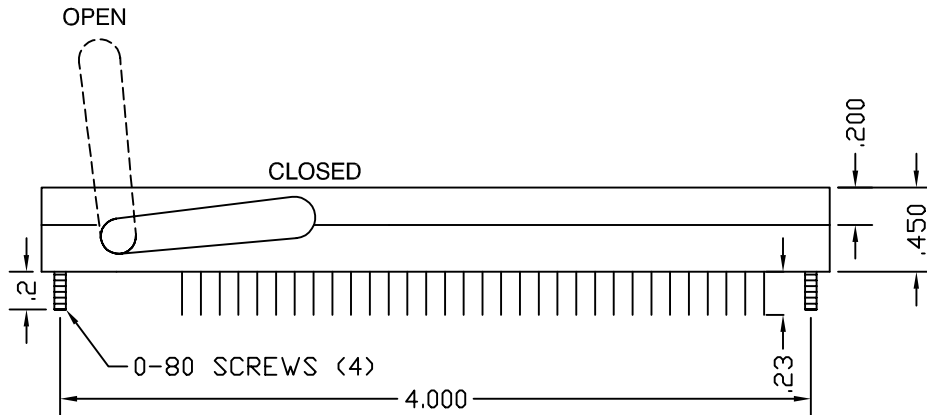

3538 Series

064-3538-002A

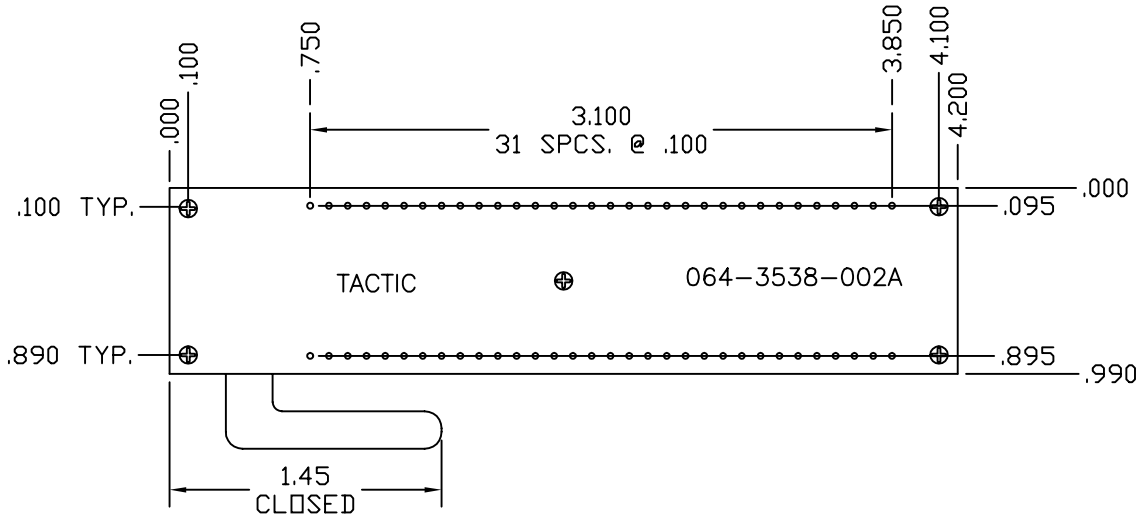

This series is designed for long in-line packages that are wider than two rows, with either square or staggered device lead patterns.

Max. working area: .80" x 3.10"
 Lead length: .200"
 Lead size accepted: .010 X .018"

Physical Insulation
 material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-0
 Color: Green

Contact Tail (.23" lg x .010" x .018")
 Material: Beryllium Copper
 Plating: 30μ (.76μm) Gold-MIL-G-45204
 Type II, Grade C over 50μ (1.3μm)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

*Consult factory or your local TACTIC Distributor for design and pricing.
 Phone: 1-800-955-4707 FAX: 1-972-867-6669*