




# 3538 Series

# 100-3538-005A

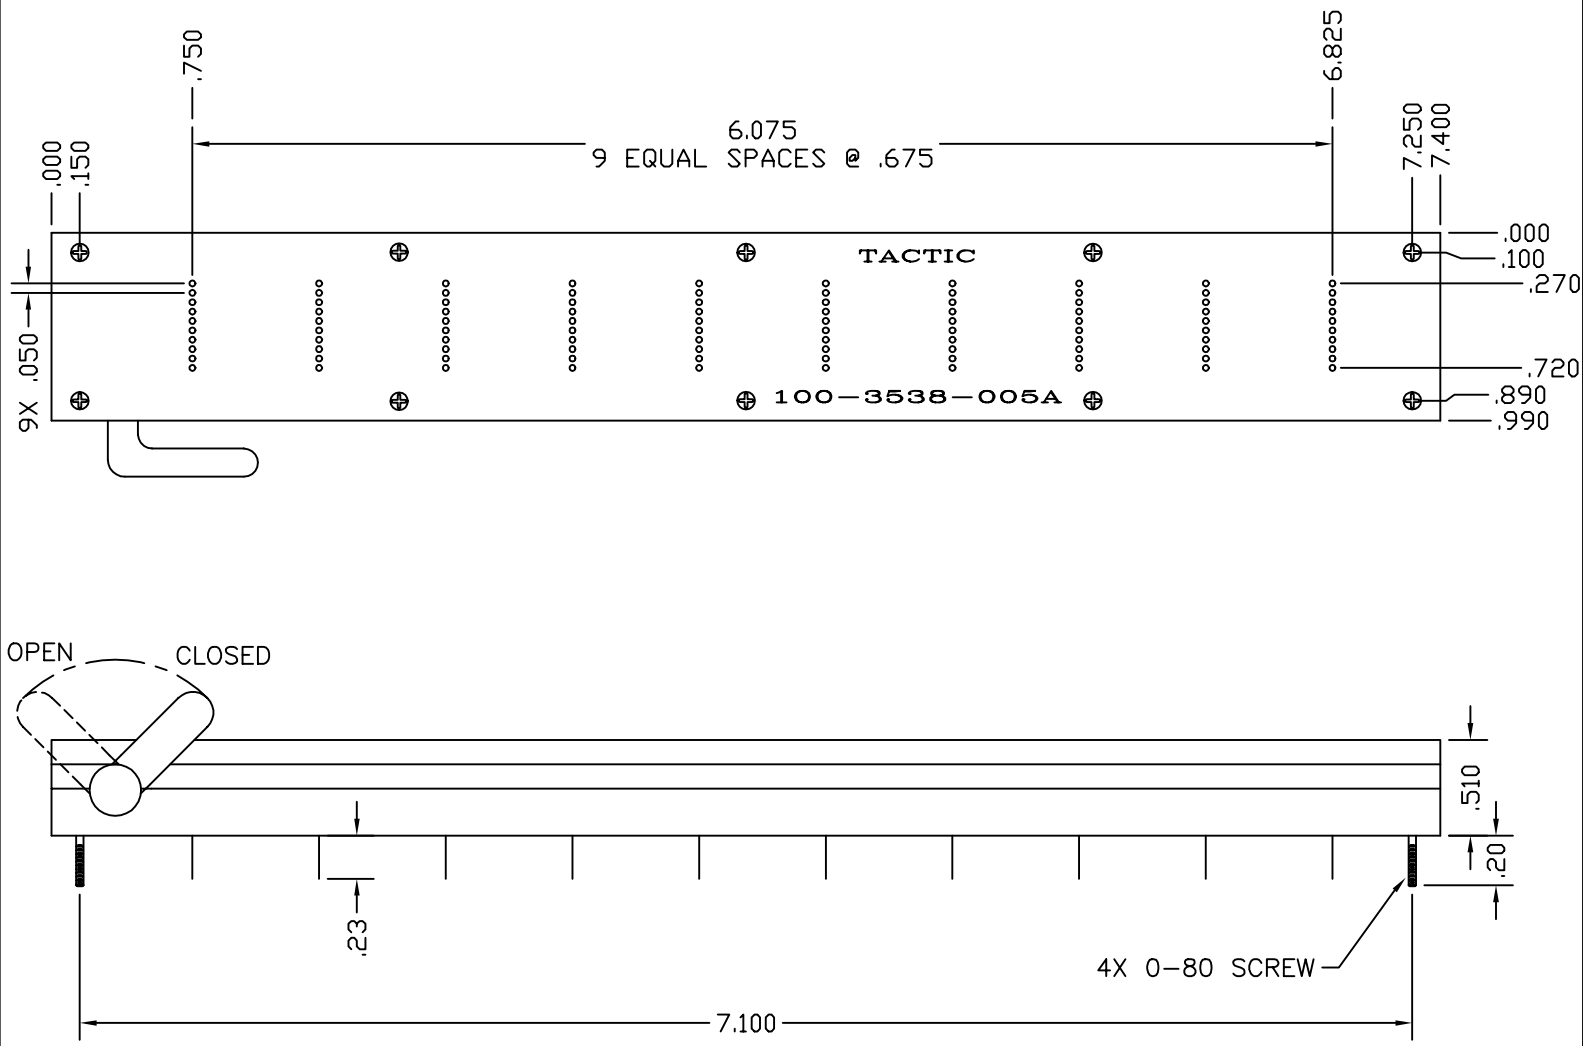

This series is designed for long in-line packages that are wider than two rows, with either square or staggered device lead patterns.

Max. working area: .70" x 6.2"  
 Min. lead length: .260"  
 Lead size accepted: .008 x .016

### Physical Insulation

material: Glass Reinforced; Polysulfone  
 Flammability: UL 94V-□  
 Color: Green

Contact (.23" lg x .010" x .018")  
 Material: Beryllium Copper  
 Plating: 30μ (.76μm) Gold-MIL-G-45204  
 Type II, Grade C over 50μ (1.3μm)  
 Sulfamate Nickel per QQ-N-290A

### Electrical

Current Rating: 1 Amp  
 Insulation Resistance: >1x10<sup>9</sup>Ω at 500Vdc  
 Withstanding Voltage: 1000 Vrms at Sea Level

### Environmental

Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

*Consult factory or your local TACTIC Distributor for design and pricing.  
 Phone: 1-800-955-4707 FAX: 1-972-867-6669*