




3538 Series

100-3538-007A

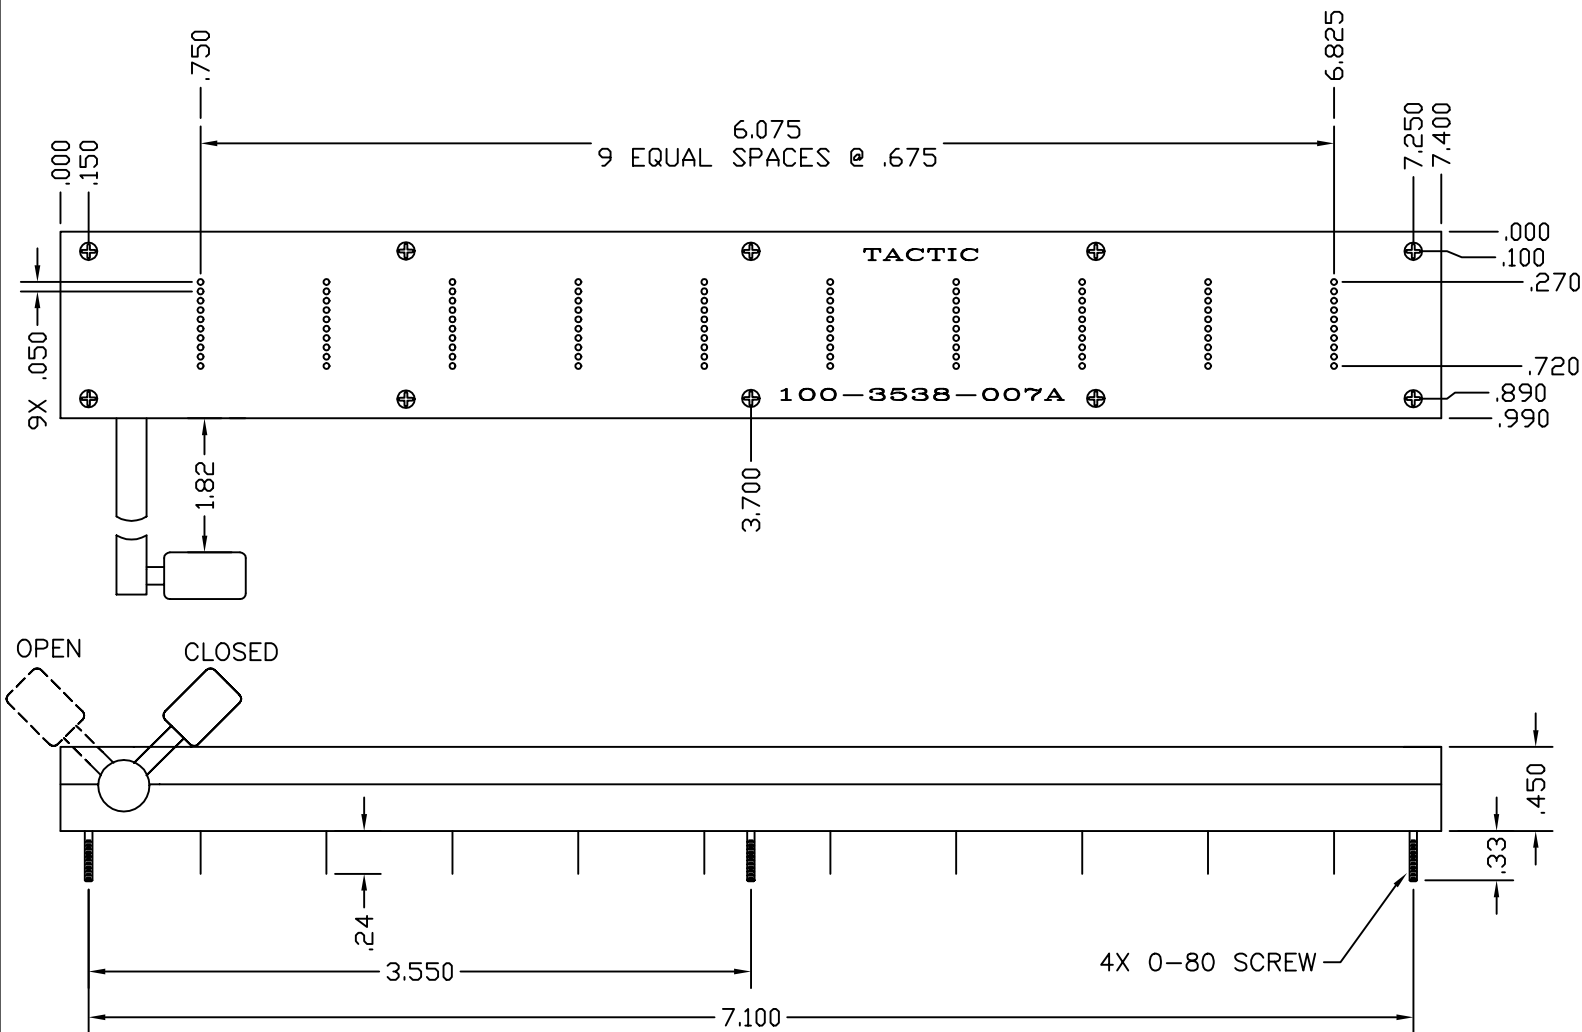

This series is designed for long in-line packages that are wider than two rows, with either square or staggered device lead patterns.

Max. working area: .70" x 6.2"
 Lead length: .170"-.200"
 Lead size accepted: .010" x .020"

Physical Insulation
 material: Glass Reinforced; Polysulfone
 Flammability: UL 94V-□
 Color: Green

Contact (.23" lg x .010" x .018")
 Material: Beryllium Copper
 Plating: 30μ"(.76μm)Gold-MIL-G-45204
 Type II, Grade C over 50μ"(1.3μm)
 Sulfamate Nickel per QQ-N-290A

Electrical Current Rating: 1 Amp
 Insulation Resistance: >1x10⁹Ω at 500Vdc
 Withstanding Voltage: 1000 Vrms at Sea Level

Environmental Temperature Rating Operational: -67°F(-55°C) to +302°F(+150°C)

Consult factory or your local TACTIC Distributor for design and pricing.
 Phone: 1-800-955-4707 FAX: 1-972-867-6669