


4662 Series ZIF Socket

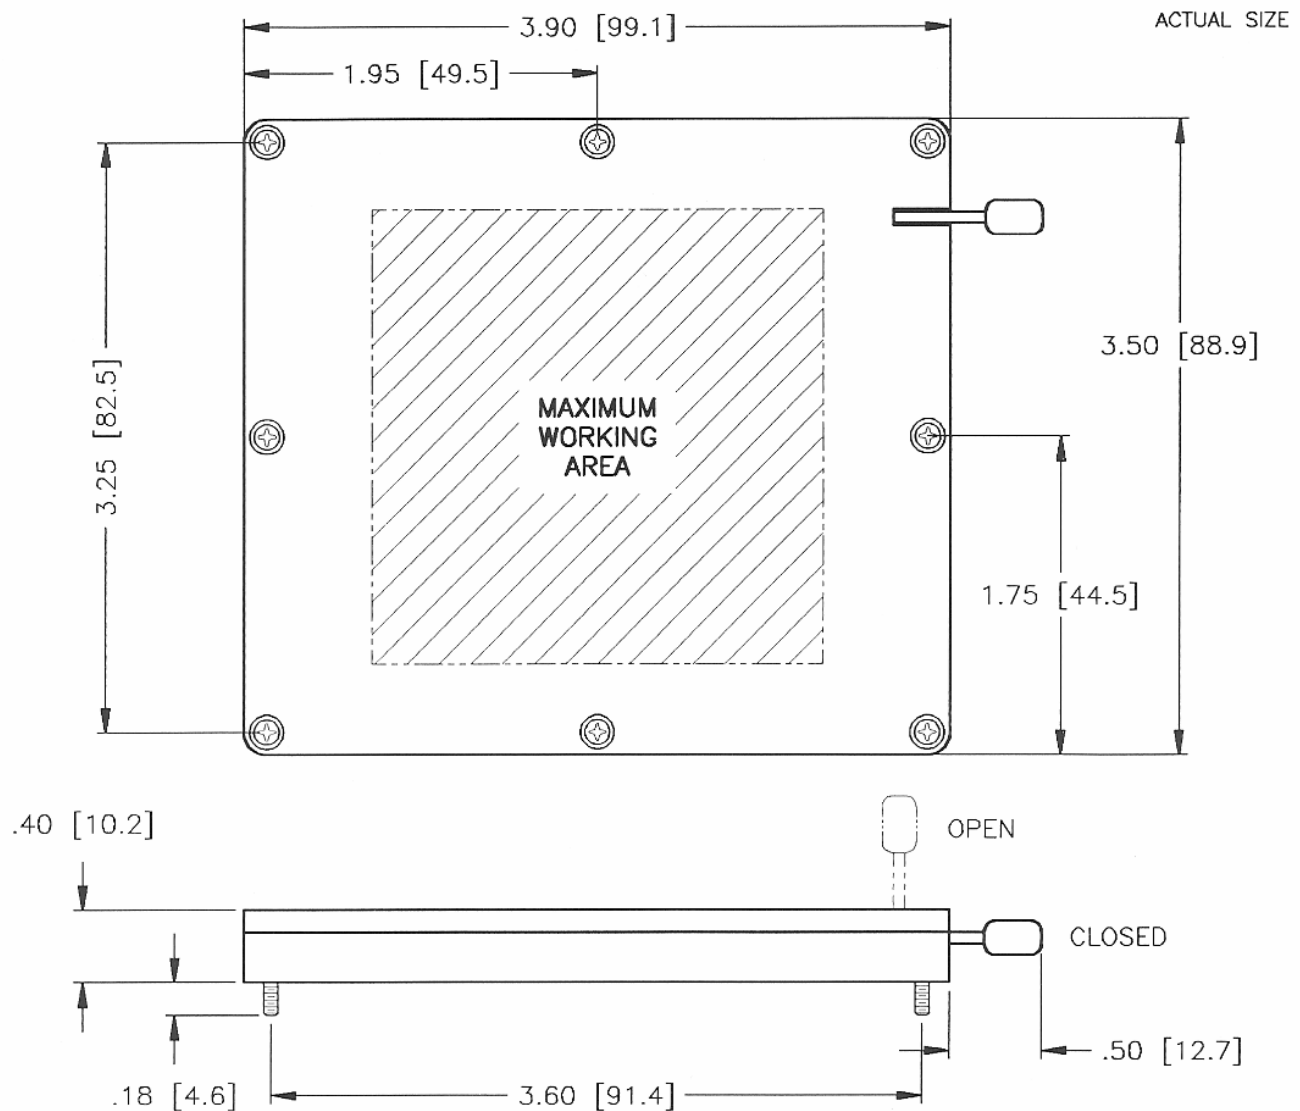

This series is identical to previously mentioned series; size is the only difference.

Maximum working area: 2.5" x 2.5"

Minimum lead length: .100"

Lead size accepted: .12" - .018"

Physical

Insulation material: Glass Reinforced; Polysulfone
Flammability: UL 94V-0
Color: Green

Contact (.130" long x .010" x .028")
Material: Beryllium Copper
Plating: 30μ" (.76μm) Gold - MIL-G-45204
Type II, Grade C over 50μ" (1.3μm)
Sulfamate Nickel per QQ-N-290A

Electrical

Current Rating: 1 Amp
Insulation Resistance: $> 1 \times 10^9 \Omega$ at 500 Vdc
Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)

Consult factory or your local TMC Distributor for design and pricing.

Phone: 1-800-955-4707