


# 4940 Series ZIF Socket

ACTUAL SIZE

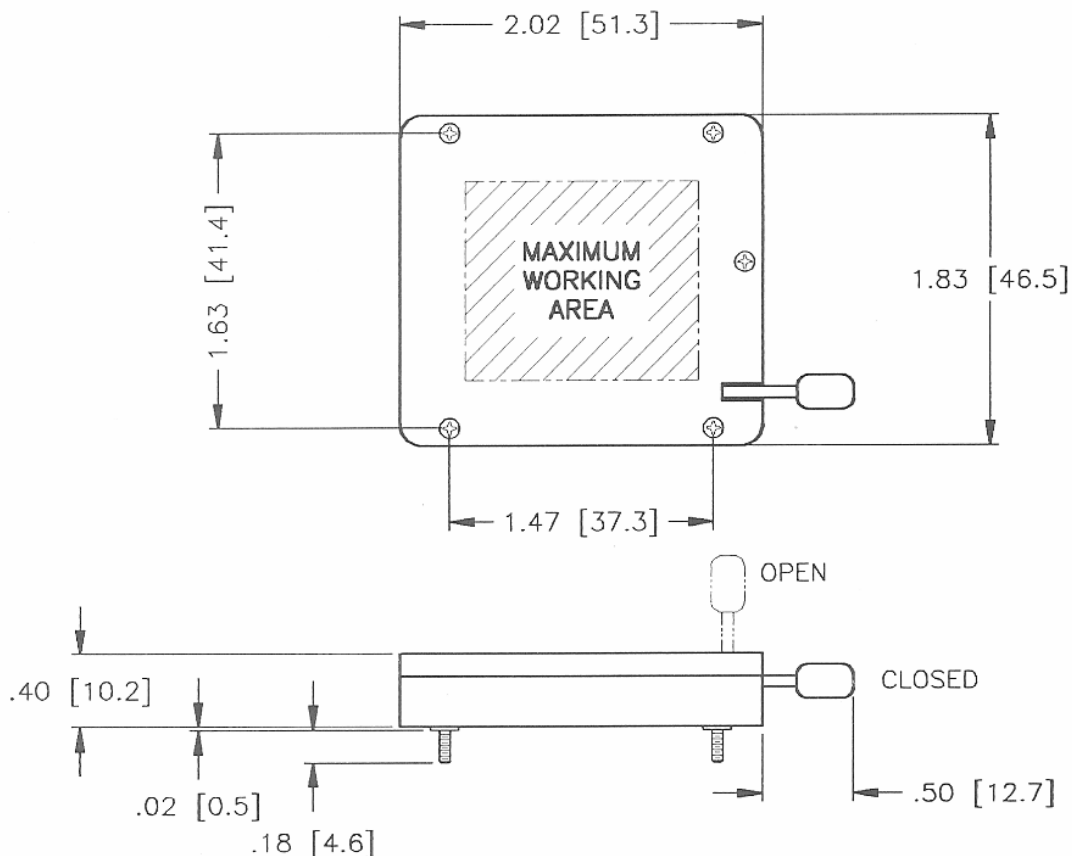

This series is identical to 3540 series with the exception of the overall size.

Maximum working area: 1.3" x 1.1"  
 Minimum lead length: .100"  
 Lead size accepted: .012" - .018"

<b>Physical</b>	Insulation material: Glass Reinforced; Polysulfone	Contact (.130" long x .010" x .028")
	Flammability: UL 94V-0	Material: Beryllium Copper
	Color: Green	Plating: 30μ" (.76μm) Gold - MIL-G-45204
		Type II, Grade C over 50μ" (1.3μm)
		Sulfamate Nickel per QQ-N-290A
<b>Electrical</b>	Current Rating: 1 Amp	
	Insulation Resistance: > 1x10 <sup>9</sup> Ω at 500 Vdc	
	Withstanding Voltage: 1000 Vrms at Sea Level	
<b>Environmental</b>	Temperature Rating Operational: -67°F (-55°C) to +302°F (+150°C)	

Consult factory or your local **TMC** Distributor for design and pricing.

**Phone: 1-800-955-4707**